

ALCOTEST 9510 PARAMETER REPORT

Equipment

Serial No.: ARMH-0246
Firmware: 8326739 1.5
WinCE application: 8326738 2.9
Configuration: 8326737 3.10

Date: 09/25/2026
Time: 09:40:25

Parameter

min. blow time	5.0	s
min. breath volume for females of age 60+	1.2	L
min. breath volume for all other	1.5	L
min. blow flow	4.5	L/min
plateau detection limit	4	%
plateau detection start conc.	70	microgram/L
neg. flow detection (part. vacuum)	10.0	hPa
neg. flow detection sensitivity	10	
cal. gas abort volume	0.4	L
result-to-zero limit	0.0050	%BAC
ambient air check limit	0.0049	%BAC
interference det. d-criterion limit abs.	38	microgram/L
interference det. d-criterion limit rel.	10.0	%
interference det. t-criterion limit abs.	8	microgram/L
interference det. t-criterion limit rel.	2.1	%
IR CO2 offset	10	microgram/L
IR H2O offset	4	microgram/L
EC H2O offset	0	microgram/L
Value-based EC aging comp. on/off (1/0)	0	
Time-based EC aging comp. on/off (1/0)	1	
Time-based EC aging comp. per month	0.2	%
Time-based EC aging comp. maximum	3.0	%
EC fatigue comp. max. sum	15000	
EC fatigue comp. factor	50	
EC fatigue comp. minutes	180	
mouth alc. mark limit	500	
mouth alc. lower limit	30	
mouth alc. slope	6	
mouth alc. zero limit	50	
mouth alc. max. neg. sum	6	
mouth alc. max. 2nd derivative	35	

ALCOTEST 9510 CERTIFICATION REPORT - WET ADJUST (PART I)
Eastampton Twp

Equipment

Inst. Model No.:	ALCOTEST 9510	Serial No.:	ARMH-0246		
Firmware:	8326739 1.5	Config.:	8326737 3.10	WinCE:	8326738 2.9

Wet Adjust Record

Wet Adjust File No.:	42	Wet Adjust Date:	09/25/2026	Wet Adjust No.:	3
		Wet Adjust Time:	10:44:04		

Concentration:	0.100 %	Adj. Unit Ser. No.:	ARMN-0039	Adj. Unit Exp.:	04/28/2027
Adjusting Unit:	X-Cal 2000	Soln. Bottle No.:	1217	Adjust Soln. Exp.:	06/03/2027
Solution Lot No.:	25180				

Preadjust Simulator Temp.:	34.00 degree C
Postadjust Simulator Temp.:	34.00 degree C

Result

Procedure completed successfully.

Coordinator

Last Name: FILLIMON -	First Name: JAMES	MI: G	Badge No.: 8306
-----------------------	-------------------	-------	-----------------

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

TP-11 James Fillimon # 8306

Signed:

Date: 09/25/2026

ID: 2673

ALCOTEST 9510 CERTIFICATION REPORT - DRY ADJUST (PART II)
Eastampton Twp

Equipment

Inst. Model No.:	ALCOTEST 9510	Serial No.:	ARMH-0246		
Firmware:	8326739 1.5	Config.:	8326737 3.10	WinCE:	8326738 2.9

Dry Adjust Record

Dry Adjust File No.:	43	Dry Adjust Date:	09/25/2026	Dry Adjust No.:	3
		Dry Adjust Time:	11:02:04		

Concentration:	0.100 %				
Dry Gas Lot No.:	302-403034216	Adjust Gas Exp.:	04/30/2027		
Barom. Model No.:	Mensor CPG2300	Barom. Serial No.:	41001RDE	Barom. Cert. Exp.:	04/23/2027
Pre-adjust Amb. Pressure:		1014 hPa	Post-adjust Amb. Pressure:		1016 hPa

Result

Procedure completed successfully.

Coordinator

Last Name: FILLIMON -	First Name: JAMES	MI: G	Badge No.: 8306
-----------------------	-------------------	-------	-----------------

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

Tr. 11 James Fillimon # PJ06

Signed:

Date: 09/25/2026

ID: 2673

ALCOTEST 9510 CERTIFICATION REPORT - LINEARITY (PART III)
Eastampton Twp

Equipment

Inst. Model No.: ALCOTEST 9510 Serial No.: ARMH-0246
Firmware: 8326739 1.5 Config.: 8326737 3.10 WinCE: 8326738 2.9

Linearity Record

Linearity File No.: 44 Lin. Date: 09/25/2026 Lin. No.: 3

0.040% Dry Gas Lot No.: 302-402999655 Adjust. Gas Exp.: 03/20/2027
0.080% Dry Gas Lot No.: 302-402956578 Adjust. Gas Exp.: 01/29/2027
0.160% Dry Gas Lot No.: 302-402922402 Adjust. Gas Exp.: 12/14/2026
0.300% Dry Gas Lot No.: 302-403055153 Adjust. Gas Exp.: 05/24/2027

Data Summary

Function	Result %BAC	Time hh:mm:ss	Barometric Pres. [hPa]	Comment(s) or Status Code
Ambient Air Blank	0.000	11:19:49		*TEST PASSED*
Control .04 Test 1 EC	0.039	11:20:28	1016	*TEST PASSED*
Control .04 Test 1 IR	0.039	11:20:28	1016	*TEST PASSED*
Ambient Air Blank	0.000	11:21:31		*TEST PASSED*
Control .04 Test 2 EC	0.039	11:21:48	1016	*TEST PASSED*
Control .04 Test 2 IR	0.040	11:21:48	1016	*TEST PASSED*
Ambient Air Blank	0.000	11:23:29		*TEST PASSED*
Control .08 Test 3 EC	0.078	11:24:06	1016	*TEST PASSED*
Control .08 Test 3 IR	0.080	11:24:06	1016	*TEST PASSED*
Ambient Air Blank	0.000	11:25:14		*TEST PASSED*
Control .08 Test 4 EC	0.080	11:25:29	1016	*TEST PASSED*
Control .08 Test 4 IR	0.081	11:25:29	1016	*TEST PASSED*
Ambient Air Blank	0.000	11:27:52		*TEST PASSED*
Control .16 Test 5 EC	0.154	11:28:28	1016	*TEST PASSED*
Control .16 Test 5 IR	0.160	11:28:28	1016	*TEST PASSED*
Ambient Air Blank	0.000	11:29:42		*TEST PASSED*
Control .16 Test 6 EC	0.158	11:29:56	1016	*TEST PASSED*
Control .16 Test 6 IR	0.162	11:29:56	1016	*TEST PASSED*
Ambient Air Blank	0.000	11:36:54		*TEST PASSED*
Control .30 Test 7 EC	0.292	11:37:30	1016	*TEST PASSED*
Control .30 Test 7 IR	0.304	11:37:30	1016	*TEST PASSED*
Ambient Air Blank	0.000	11:38:53		*TEST PASSED*
Control .30 Test 8 EC	0.297	11:39:06	1016	*TEST PASSED*
Control .30 Test 8 IR	0.306	11:39:06	1016	*TEST PASSED*
Ambient Air Blank	0.000	11:39:41		*TEST PASSED*

Result

All tests within acceptable tolerance.

Coordinator

Last Name: FILLIMON - First Name: JAMES MI: G Badge No.: 8306

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

Tp 11 Jan 2026 # 8306

Signed:

Date: 09/25/2026

ID: 2673

ALCOTEST 9510 CYLINDER INSTALLATION REPORT - INLET 1
Eastampton Twp
SERIAL NUMBER: ARMH-0246

Equipment

Inst. Model No.: ALCOTEST 9510 Serial No.: ARMH-0246
Firmware: 8326739 1.5 Config.: 8326737 3.10 WinCE: 8326738 2.9
Cyl1 Install File No.: 27 Cyl1 Install Date: 12/30/2025 Cyl1 Install No.: 1

Control Tests (0.100%)

Installation Inlet: #1 (Upper) Post test active Cyl.: #1 (Upper)
Dry Gas Lot No.: 302-403035125 Dry Gas Lot Exp.: 05/06/2027

Data Summary

Function	Result %BAC	Time hh:mm:ss	Barometric Pres. [hPa]	Comment(s) or Status Code
Ambient Air Blank	0.000	09:02:58		*TEST PASSED*
Control Test 1			1005	*TEST PASSED*
EC Result	0.097	09:03:48		*TEST PASSED*
IR Result	0.100	09:03:48		*TEST PASSED*
Ambient Air Blank	0.000	09:05:01		*TEST PASSED*
Control Test 2			1005	*TEST PASSED*
EC Result	0.098	09:05:30		*TEST PASSED*
IR Result	0.100	09:05:30		*TEST PASSED*
Ambient Air Blank	0.000	09:06:43		*TEST PASSED*
Control Test 3			1005	*TEST PASSED*
EC Result	0.100	09:07:12		*TEST PASSED*
IR Result	0.100	09:07:12		*TEST PASSED*
Ambient Air Blank	0.000	09:07:46		*TEST PASSED*

Result

All tests within acceptable tolerance.

Coordinator

Last Name: BELLAY -

First Name: DAVID

MI: M Badge No.: 8112

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

12/30/25 David Bellay 8112

Signed:

Date: 12/30/2025

ID: 50

ALCOTEST 9510 CYLINDER INSTALLATION REPORT - INLET 2
Eastampton Twp
SERIAL NUMBER: ARMH-0246

Equipment

Inst. Model No.: ALCOTEST 9510 Serial No.: ARMH-0246
Firmware: 8326739 1.5 Config.: 8326737 3.10 WinCE: 8326738 2.9
Cyl2 Install File No.: 28 Cyl2 Install Date: 12/30/2025 Cyl2 Install No.: 1

Control Tests (0.100%)

Installation Inlet: #2 (Lower) Post test active Cyl.: #1 (Upper)
Dry Gas Lot No.: 302-403368142 Dry Gas Lot Exp.: 06/11/2028

Data Summary

Function	Result %BAC	Time hh:mm:ss	Barometric Pres. [hPa]	Comment(s) or Status Code
Ambient Air Blank	0.000	09:15:46		*TEST PASSED*
Control Test 1			1005	*TEST PASSED*
EC Result	0.098	09:16:36		*TEST PASSED*
IR Result	0.101	09:16:36		*TEST PASSED*
Ambient Air Blank	0.000	09:17:49		*TEST PASSED*
Control Test 2			1005	*TEST PASSED*
EC Result	0.100	09:18:17		*TEST PASSED*
IR Result	0.100	09:18:17		*TEST PASSED*
Ambient Air Blank	0.000	09:19:31		*TEST PASSED*
Control Test 3			1005	*TEST PASSED*
EC Result	0.100	09:19:59		*TEST PASSED*
IR Result	0.101	09:19:59		*TEST PASSED*
Ambient Air Blank	0.000	09:20:33		*TEST PASSED*

Result

All tests within acceptable tolerance.

Coordinator

Last Name: BELLAY -

First Name: DAVID

MI: M Badge No.: 8112

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.



Signed:

Date: 12/30/2025

ID: 50

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4401036
DRAEGER MEDICAL SYSTEMS INC

Sales order: 1130434779
Date: May 23, 2024

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY: ± 0.002 BrAC or $\pm 2\%$ whichever is greater.

CALGAZ LOT#: 302-403035125

Manufactured Date: May 06, 2024

ETHANOL IN NITROGEN

Product Expiration: May 06, 2027

COMPONENT	PPM	(BrAC)
ETHANOL	260.5PPM	(0.100)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	263.8	(0.101)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND38424	260.7

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:


Analytical Instruments Calibrated Using NMI Traceable Standards.

Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

APPROVED BY: 

"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
821 Chesapeake Drive, Cambridge, MD 21613-0149
Phone: (410) 228-6400 Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4401036

DRAEGER MEDICAL SYSTEMS INC

Sales order: 1140199442

Date: June 18, 2025

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY: ± 0.002 BrAC or $\pm 2\%$ whichever is greater.

CALGAZ LOT#: 302-403368142

Manufactured Date: June 11, 2025

ETHANOL IN NITROGEN

Product Expiration: June 11, 2028

COMPONENT	PPM	(BrAC)
ETHANOL	260.5PPM	(0.100)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	263.8	(0.101)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND49826	260.1

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.
Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.

Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

APPROVED BY:




"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC

821 Chesapeake Drive, Cambridge, MD 21613-0149

Phone: (410) 228-6400

Fax: (410) 228-4251

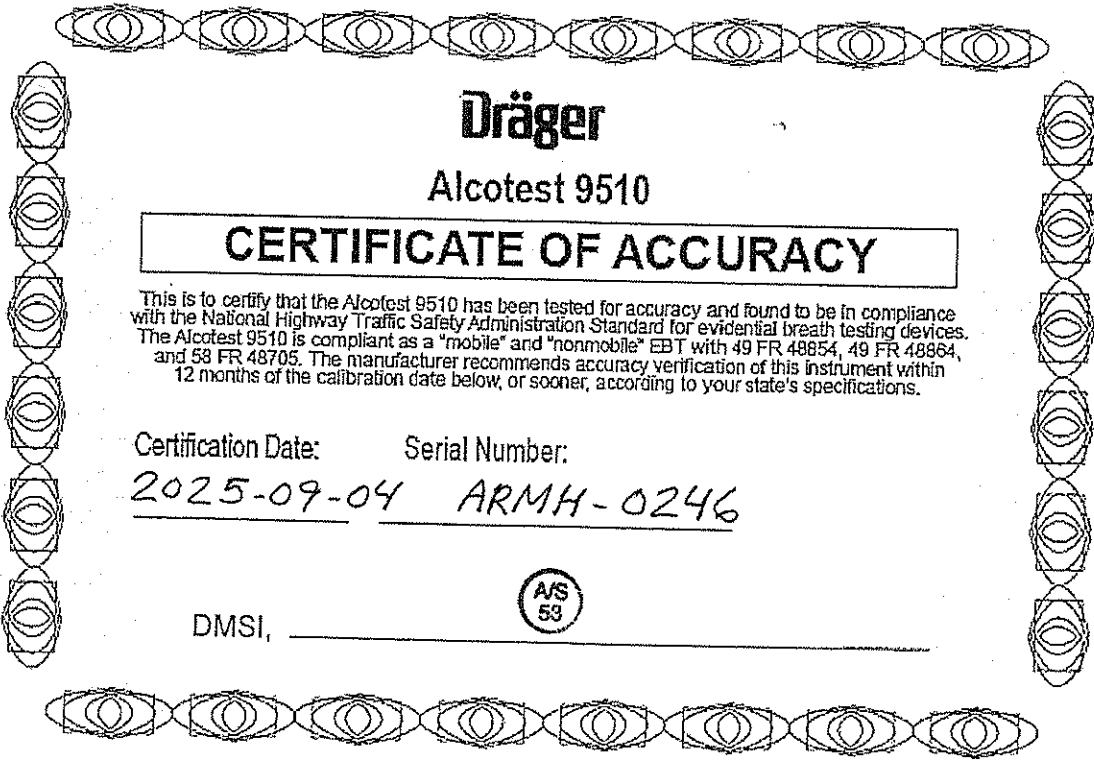

Dräger

Alcotest 9510

CERTIFICATE OF ACCURACY

This is to certify that the Alcotest 9510 has been tested for accuracy and found to be in compliance with the National Highway Traffic Safety Administration Standard for evidential breath testing devices. The Alcotest 9510 is compliant as a "mobile" and "nonmobile" EBT with 49 FR 48854, 49 FR 48864, and 58 FR 48705. The manufacturer recommends accuracy verification of this instrument within 12 months of the calibration date below, or sooner, according to your state's specifications.

Certification Date:

Serial Number:

2025-09-04 ARMH-0246

DMSI, _____





State of New Jersey

OFFICE OF THE ATTORNEY GENERAL
DEPARTMENT OF LAW AND PUBLIC SAFETY
DIVISION OF STATE POLICE
POST OFFICE BOX 7068
WEST TRENTON, NJ 08628-0068
(609) 882-2000

PHILIP D. MURPHY
Governor

TAHESHA L. WAY
Lt. Governor

MATTHEW J. PLATKIN
Attorney General

COLONEL PATRICK J. CALLAHAN
Superintendent

CERTIFICATION OF ANALYSIS **0.100 PERCENT BREATH ALCOHOL SIMULATOR SOLUTION**

ACCEPTANCE SPECIFICATIONS FOR BREATH ALCOHOL SIMULATOR SOLUTION: Ethyl alcohol concentration within, but not exceeding, the range of 0.1174 to 0.1246 grams per 100 milliliters of solution.

MANUFACTURER: Draeger, Inc.


ANALYSIS DATE: 06/17/2025

BREATH ALCOHOL SIMULATOR SOLUTION LOT NUMBER: 25180

Representative samples of the above-referenced Lot Number were tested by Gas Chromatography and found to have a mean ethyl alcohol concentration range of 0.1211 to 0.1221 grams per 100 milliliters of solution.


This lot of breath alcohol simulator solution may be utilized as a known traceable standard for the purpose of conducting periodic tests, pursuant to N.J.A.C. 13:51-4.3, of approved breath test instruments (N.J.A.C. 13:51-3.5) utilized by law enforcement agencies in this State. The manufacturer's expiration date for this lot of breath alcohol simulator solution is June 03, 2027.

As OFS Director for the Division of State Police, I hereby certify and attest that the tests and results documented in this Certificate of Analysis were performed at the Office of Forensic Sciences of the Division of State Police on properly functioning and calibrated instruments and equipment. All procedures utilized are accurate, objective, and performed on a routine basis by personnel within the Office of Forensic Sciences, in accordance with their professional duties and responsibilities.


Michael Kennedy
Director
NJSP Office of Forensic Sciences

Sworn to and subscribed before me this 26 day of June, 2025.

Notary




"An Internationally Accredited Agency"

New Jersey Is An Equal Opportunity Employer
Printed on Recycled Paper and Recyclable





CERTIFICATE OF CALIBRATION



Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SUW4303936946

Certificate/SO Number: 5-G2M7E-120-1 Revision 0

Manufacturer: Drager Safety AG & Co. KGaA
Model Number: X-Cal 2000
Description: Breath Alcohol Simulator
Serial Number: ARMN-0039
ID: NONE

As-Found: Out Of Tolerance
As-Left: In Tolerance

Issue Date: Apr 29, 2026
Calibration Date: Apr 28, 2026
Due Date: Apr 28, 2027

Calibrated To: Manufacturer Specification
Calibration Procedure: 1-AC103519-2

This calibration conforms to ISO/IEC 17025:2017, ANSI/NCSL Z540-1-1994, ISO 9001:2015, and ISO 10012:2003. When specified contractually, the requirements of ISO TS16949:2009, 10CFR21, 10CFR50 App. B, ASME NQA-1-2012, and ANSI/NCSL Z540-3-2006 (R2013) are also covered. Standards are traceable to the SI either through the National Institute of Standards & Technology (NIST), the National Research Council of Canada (NRC), other national measurement institutes (NMI) that are signatories to the CIPM Mutual Recognition Arrangement, natural physical constants, intrinsic standards, or ratio type measurements. The results of this report relate only to the item calibrated or tested. Reported data is valid at the time of calibration at the environmental conditions noted. This certificate shall not be reproduced except in full, without the written consent of Transcat Inc. Uncertainties are reported with a coverage factor k=2, providing a level of confidence of approximately 95%. When a decision rule is inherent in the specification or the standard the prescribed decision rule was used, otherwise where a statement of conformance is made, it was made based on the measurement meeting the limit, with no guard-banding applied. Per ILAC G8 Simple Decision rule TUR is $\geq 4:1$ unless otherwise noted in the data.

Notes:

The OOT readings were verified. Unit was received Out of Tolerance and adjustments were made for best overall accuracy.

Calibrated At:
16115 Park Row
Houston, TX 77084

Facility Responsible:
16115 Park Row
Houston, TX 77084
800-828-1470

Calibrated By:
 Electronically Signed By:
Jempson Andre

Reviewed By:
 Electronically Signed By:
Graham Walker for

Jempson Andre Apr 28, 2026
Calibration Technician 21:47:55 -04:00

Josh Soileau Apr 29, 2026
Lab Manager 05:54:13 -04:00

Unit Barcode: 09008587243

Date Received: April 23, 2026
Service Level: R9


Certificate - Page 1 of 3
Reprinted on June 10, 2026

Customer Number: 1-659111-000



CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SUW4303936946



Certificate/SO Number: 5-G2M7E-120-1 Revision 0

As Found Data

Description	Setpoints	Accuracy	Low Limit	High Limit	As Found	O O T	Cal Process Uncertainty (k=2; ±)	Measurement Uncertainty (k=2; ±)	Units	TUR
Function Checks										
Bubble Check			P	P	P					
Seal Check			P	P	P					
Temperature Source: Accuracy Test										
Accuracy Test	34.00°C	±(0.02 °C)	33.98	34.02	34.06 °C	*	1.5e-002	1.6e-002	°C	1.3 : 1
Temperature Source: Stability Test										
Stability Test	0.00°C	±(0.02 °C)	-0.02	0.02	0.00 °C					

As Left Data

Description	Setpoints	Accuracy	Low Limit	High Limit	As Left	O O T	Cal Process Uncertainty (k=2; ±)	Measurement Uncertainty (k=2; ±)	Units	TUR
Function Checks										
Bubble Check			P	P	P					
Seal Check			P	P	P					
Temperature Source: Accuracy Test										
Accuracy Test	34.00°C	±(0.02 °C)	33.98	34.02	34.00 °C		1.5e-002	1.6e-002	°C	1.3 : 1
Temperature Source: Stability Test										
Stability Test	0.00°C	±(0.02 °C)	-0.02	0.02	0.00 °C					


Field not applicable.

Date Received: April 23, 2026
Service Level: R9

Certificate - Page 2 of 3
Reprinted on June 10, 2026

Customer Number: 1-659111-000

CERTIFICATE OF CALIBRATION



Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SUW4303936946

Certificate/SO Number: 5-G2M7E-120-1 Revision 0

Traceable Standards

Asset	Manufacturer	Model Number	Description	Cat Date	Due Date	Traceability Number	Use
05H1425	Hart Scientific/Fluke	5615-12-P	Secondary Reference PRT	18-Apr-25	30-Apr-25	15-805H1425-4-1	AF/AL
5656	Fluke	1524	Handheld Thermometer	13-Jun-25	30-Jun-26	5 -85656-21-1	AF/AL

The use of the standard is defined as: AF - used for as-found readings, AL - used for as-left readings.


Environmental Data

	Temperature	Relative Humidity	Temp / RH Asset	Lab Area	Lab Description
As Found:	70.24°F / 21.24°C	50.90%	DewK11	G	Temperature
As Left:	70.14°F / 21.19°C	53.10%	DewK11	G	Temperature



CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SUW4303935946



Certificate/SO Number: 5-G2M7E-40-1 Revision 0

Manufacturer: Mensor Corp
Model Number: CPG2300
Description: Portable Barometer
Serial Number: 41001RDE
ID: NONE

As-Found: In Tolerance
As-Left: In Tolerance

Issue Date: Apr 24, 2026
Calibration Date: Apr 23, 2026
Due Date: Apr 23, 2027

Calibrated To: Manufacturer Specification
Calibration Procedure: 1-AC94879-0

This calibration conforms to ISO/IEC 17025:2017, ANSI/NCSL Z540-1:1994, ISO 9001:2015, and ISO 10012:2003. When specified contractually, the requirements of ISO TS16949:2009, 10CFR21, 10CFR50 App. B, ASME NQA-1 2012, and ANSI/NCSL Z540.3-2006 (R2013) are also covered. Standards are traceable to the SI either through the National Institute of Standards & Technology (NIST), the National Research Council of Canada (NRC), other national measurement institutes (NMI) that are signatories to the CIPM Mutual Recognition Arrangement, natural physical constants, intrinsic standards, or ratio type measurements. The results of this report relate only to the item calibrated or tested. Reported data is valid at the time of calibration at the environmental conditions noted. This certificate shall not be reproduced except in full, without the written consent of Transcat Inc. Uncertainties are reported with a coverage factor $k=2$, providing a level of confidence of approximately 95%. When a decision rule is inherent in the specification or the standard the prescribed decision rule was used, otherwise where a statement of conformance is made, it was made based on the measurement meeting the limit, with no guard-banding applied. Per ILAC G8 Simple Decision rule $TUR \geq 4:1$ unless otherwise noted in the data.

Calibrated At:
16115 Park Row
Houston, TX 77084

Facility Responsible:
16115 Park Row
Houston, TX 77084
800-828-1470

Calibrated By:

Electronically Signed By:
Alex Spilker

Reviewed By:

Electronically Signed By:
Christopher Bortz for

Unit Barcode:
0900B587251

Alex Spilker Apr 23, 2026
Calibration Technician 21:47:31 -04:00

Josh Soileau Apr 24, 2026
Lab Manager 08:54:57 -04:00

Date Received: April 23, 2026
Service Level: R9


Certificate - Page 1 of 4
Reprinted on June 10, 2026

Customer Number: 1-659111-000



CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SUW4303936946



Certificate/SO Number: 5-G2M7E-40-1 Revision 0

As Found Data

Description	Setpoints	Accuracy	Low Limit	High Limit	As Found	O O T	Cal Process Uncertainty (k=2; ±)	Measurement Uncertainty (k=2; ±)	Units	TUR
Pressure Measure: 8 to 17 psia Range										
	7.978psia	±(0.015% FS)	7.975	7.981	7.975 psia		1.4e-004	6.0e-004	psia	20.9 : 1
	8.847psia	±(0.015% FS)	8.844	8.850	8.845 psia		1.6e-004	6.0e-004	psia	18.8 : 1
	9.868psia	±(0.015% FS)	9.865	9.871	9.866 psia		1.8e-004	6.0e-004	psia	16.9 : 1
	10.650psia	±(0.015% FS)	10.647	10.653	10.648 psia		1.9e-004	6.1e-004	psia	15.8 : 1
	11.670psia	±(0.015% FS)	11.667	11.673	11.668 psia		2.1e-004	6.2e-004	psia	14.3 : 1
	12.544psia	±(0.015% FS)	12.541	12.547	12.542 psia		2.3e-004	6.1e-004	psia	13.3 : 1
	13.415psia	±(0.015% FS)	13.412	13.418	13.413 psia		2.4e-004	6.3e-004	psia	12.4 : 1
	14.289psia	±(0.015% FS)	14.286	14.292	14.287 psia		2.6e-004	6.3e-004	psia	11.7 : 1
	15.140psia	±(0.015% FS)	15.137	15.143	15.138 psia		2.7e-004	6.4e-004	psia	11.0 : 1
	16.160psia	±(0.015% FS)	16.157	16.163	16.158 psia		2.9e-004	6.5e-004	psia	10.3 : 1
	17.035psia	±(0.015% FS)	17.032	17.038	17.033 psia		3.1e-004	6.5e-004	psia	9.8 : 1
	13.415psia	±(0.015% FS)	13.412	13.418	13.413 psia		2.4e-004	6.3e-004	psia	12.4 : 1
	12.544psia	±(0.015% FS)	12.541	12.547	12.543 psia		2.3e-004	6.1e-004	psia	13.3 : 1
	11.670psia	±(0.015% FS)	11.667	11.673	11.668 psia		2.1e-004	6.2e-004	psia	14.3 : 1

Date Received: April 23, 2026
Service Level: R9


Certificate - Page 2 of 4
Reprinted on June 10, 2026

Customer Number: 1-659111-000



CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SUW4303936945



Certificate/SO Number: 5-G2M7E-40-1 Revision 0

As Left Data

Description	Setpoints	Accuracy	Low Limit	High Limit	As Left	Q O T	Cal Process Uncertainty (k=2; ±)	Measurement Uncertainty (k=2; ±)	Units	TUR
Pressure Measure: 8 to 17 psia Range										
	7.978psia	±(0.015% FS)	7.975	7.981	7.978 psia		1.4e-004	6.0e-004	psia	20.9 : 1
	8.847psia	±(0.015% FS)	8.844	8.850	8.847 psia		1.6e-004	6.0e-004	psia	18.6 : 1
	9.868psia	±(0.015% FS)	9.865	9.871	9.868 psia		1.8e-004	6.0e-004	psia	16.9 : 1
	10.650psia	±(0.015% FS)	10.647	10.653	10.650 psia		1.9e-004	6.1e-004	psia	15.6 : 1
	11.670psia	±(0.015% FS)	11.667	11.673	11.670 psia		2.1e-004	6.2e-004	psia	14.3 : 1
	12.544psia	±(0.015% FS)	12.541	12.547	12.544 psia		2.3e-004	6.1e-004	psia	13.3 : 1
	13.415psia	±(0.015% FS)	13.412	13.418	13.415 psia		2.4e-004	6.3e-004	psia	12.4 : 1
	14.289psia	±(0.015% FS)	14.286	14.292	14.289 psia		2.6e-004	6.3e-004	psia	11.7 : 1
	15.140psia	±(0.015% FS)	15.137	15.143	15.140 psia		2.7e-004	6.4e-004	psia	11.0 : 1
	16.160psia	±(0.015% FS)	16.157	16.163	16.160 psia		2.9e-004	6.5e-004	psia	10.3 : 1
	17.035psia	±(0.015% FS)	17.032	17.038	17.035 psia		3.1e-004	6.5e-004	psia	9.8 : 1
	13.415psia	±(0.015% FS)	13.412	13.418	13.415 psia		2.4e-004	6.3e-004	psia	12.4 : 1
	12.544psia	±(0.015% FS)	12.541	12.547	12.544 psia		2.3e-004	6.1e-004	psia	13.3 : 1
	11.670psia	±(0.015% FS)	11.667	11.673	11.670 psia		2.1e-004	6.2e-004	psia	14.3 : 1

Field not applicable.

Traceable Standards

Asset	Manufacturer	Model Number	Description	Cal Date	Due Date	Traceability Number	Use
DW11BA	Fluke/DH Instruments	PG7601	Piston Gauge	31-Jul-25	31-Jul-26	5-&DW11BA-20-1	AF/AL
DW11CA	Fluke/DH Instruments	MS-AMH-38	AMH Mass Set	2-Feb-26	31-May-26	5-&DW11CA-46-1	AF/AL
DW11LOW	Fluke/DH Instruments	PC-7100/7600-10-TC	Gas Piston-Cylinder Module	8-Apr-22	30-Apr-27	5-&DW11LOW-3-1	AF/AL
DW11MASS	Fluke/DH Instruments	MS-AMH-38	AMH Mass Set	6-Apr-26	30-Apr-27	5-&DW11MASS-14-1	AF/AL

The use of the standard is defined as: AF - used for as-found readings, AL - used for as-left readings.

Date Received: April 23, 2026
Service Level: R8


Certificate - Page 3 of 4
Reprinted on June 10, 2025

Customer Number: 1-659111-000

CALIBRATED
BY **TRANSAT**

CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SUW4303936946



Certificate/SO Number: 5-G2M7E-40-1 Revision 0

Environmental Data

Temperature	Relative Humidity	Temp / RH Asset	Lab Area	Lab Description
68.87°F /20.48°C	48.40%	DewK10	B	GP Pressure

Date Received: April 23, 2026
Service Level: R9

Certificate - Page 4 of 4
Reprinted on June 10, 2026

Customer Number: 1-659111-000

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4401036

DRAEGER MEDICAL SYSTEMS INC

Sales order: 1130434779

Date: May 23, 2024

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY: ± 0.002 BrAC or $\pm 2\%$ whichever is greater.

CALGAZ LOT#: 302-403034216

Manufactured Date: April 30, 2024

ETHANOL IN NITROGEN

Product Expiration: April 30, 2027

COMPONENT	PPM	(BrAC)
ETHANOL	260.5PPM	(0.100)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	264.1	(0.101)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND38424	260.7

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.


Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

APPROVED BY:



"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC

821 Chesapeake Drive, Cambridge, MD 21613-0149

Phone: (410) 228-6400

Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4507062

DRAEGER MEDICAL SYSTEMS INC

Sales order: 1130434779

Date: May 22, 2024

METHOD OF ANALYSIS: IR-Breath Alcohol Analyzer

ANALYTICAL ACCURACY: ± 0.002 BrAC or $\pm 2\%$ whichever is greater.

CALGAZ LOT#: 302-402999655

Manufactured Date: March 20, 2024

ETHANOL IN NITROGEN

Product Expiration: March 20, 2027

COMPONENT	PPM	(BrAC)
ETHANOL	104.2PPM	(0.040)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	107.9	(0.041)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND28529	103.7

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.


Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

APPROVED BY:



"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC

821 Chesapeake Drive, Cambridge, MD 21613-0149

Phone: (410) 228-6400

Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4411025
DRAEGER MEDICAL SYSTEMS INC

Sales order: 1128191688
Date: March 05, 2024

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer
ANALYTICAL ACCURACY: ± 0.002 BrAC or $\pm 2\%$ whichever is greater.
CALGAZ LOT#: 302-402956578
ETHANOL IN NITROGEN

Product Expiration: January 29, 2027

COMPONENT	PPM	(BrAC)
ETHANOL	208.4PPM	(0.080)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	212.7	(0.082)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND38424	260.7

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.


Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: January 29, 2024

APPROVED BY: 

"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 170.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
821 Chesapeake Drive, Cambridge, MD 21613-0149
Phone: (410) 228-6400 Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4401040NJ
DRAEGER MEDICAL SYSTEMS INC

Sales order: 1126209454
Date: December 18, 2023

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer
ANALYTICAL ACCURACY: ± 0.002 BrAC or $\pm 2\%$ whichever is greater.
CALGAZ LOT#: 302-402922402
ETHANOL IN NITROGEN

Product Expiration: December 14, 2026

COMPONENT	PPM	(BrAC)
ETHANOL NITROGEN	416.8PPM BAL	(0.160)
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	421.3	(0.162)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND38424	260.7

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.

Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: December 14, 2023

APPROVED BY:



"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
821 Chesapeake Drive, Cambridge, MD 21613-0149
Phone: (410) 228-6400 Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4401041NJ
DRAEGER MEDICAL SYSTEMS INC

Sales order: 1130435101
Date: May 28, 2024

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer
ANALYTICAL ACCURACY: ± 0.002 BrAC or $\pm 2\%$ whichever is greater.
CALGAZ LOT#: 302-403055153
ETHANOL IN NITROGEN:

Manufactured Date: May 24, 2024
Product Expiration: May 24, 2027

COMPONENT	PPM	(BrAC)
ETHANOL	781.5PPM	(0.300)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	786.7	(0.302)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND23368	519.5

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.
Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).
CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

APPROVED BY:



"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
821 Chesapeake Drive, Cambridge, MD 21613-0149
Phone: (410) 228-6400 Fax: (410) 228-4251

DEPARTMENT OF
Traffic and Public Safety
This is to certify that

James G. Fillimon
New Jersey State Police

IS QUALIFIED AND COMPETENT TO CONDUCT CHEMICAL BREATH ANALYSES PURSUANT TO CHAPTER 141 OF
THE LAWS OF 1964 IN THE OPERATION OF THE Alcotest 9510
A METHOD TO DETERMINE INTOXICATION.
GIVEN UNDER MY HAND AT TRENTON, NEW JERSEY THIS 3rd DAY OF October
TWO THOUSAND AND Twenty Three

D. J. P. [Signature] COLONEL
NEW JERSEY STATE POLICE

Mr. J. A. [Signature] ATTORNEY GENERAL
STATE OF NEW JERSEY

DEPARTMENT OF
Traffic and Public Safety
This is to certify that

James G. Fillimon
Breath Test Coordinator/Instructor

IS QUALIFIED AND COMPETENT TO CONDUCT CHEMICAL BREATH ANALYSES PURSUANT TO CHAPTER 141 OF
THE LAWS OF 1964 IN THE OPERATION OF THE Alcotest 9510
A METHOD TO DETERMINE INTOXICATION.
GIVEN UNDER MY HAND AT TRENTON, NEW JERSEY THIS 18th DAY OF November
TWO THOUSAND AND Twenty Five

D. J. P. [Signature] COLONEL
NEW JERSEY STATE POLICE

Mr. J. A. [Signature] ATTORNEY GENERAL
STATE OF NEW JERSEY

ORIGINAL COURSE DATES

DATE	Refresher Course PLACE	INSTRUCTOR
1. <u>4-10-25</u>	<u>MCFF</u>	<u>A. D.</u>
2. _____	_____	_____
3. _____	_____	_____
4. _____	_____	_____
5. _____	_____	_____
6. _____	_____	_____
7. _____	_____	_____
8. _____	_____	_____
9. _____	_____	_____

S.P. 2938 (Rev. 10/22)

ORIGINAL COURSE DATES

DATE	Refresher Course PLACE	INSTRUCTOR
1. _____	_____	_____
2. _____	_____	_____
3. _____	_____	_____
4. _____	_____	_____
5. _____	_____	_____
6. _____	_____	_____
7. _____	_____	_____
8. _____	_____	_____
9. _____	_____	_____

S.P. 2938 (Rev. 10/22)

DEPARTMENT OF
Traffic and Public Safety
This is to certify that

David M. Bellay

New Jersey State Police

IS QUALIFIED AND COMPETENT TO CONDUCT CHEMICAL BREATH ANALYSES PURSUANT TO CHAPTER 142 OF

THE LAWS OF 1966 IN THE OPERATION OF THE **Alcotest 9510**

A METHOD TO DETERMINE INTOXICATION.

GIVEN UNDER MY HAND AT TRENTON, NEW JERSEY THIS **28th** DAY OF **April**

TWO THOUSAND AND **Twenty Three**

[Signature]
COLONEL
NEW JERSEY STATE POLICE

[Signature]
ATTORNEY GENERAL
STATE OF NEW JERSEY

ORIGINAL COURSE DATES

DATE	Refresher Course PLACE	INSTRUCTOR
1. 3-27-25	MCFA	A. J. B.
2. _____	_____	_____
3. _____	_____	_____
4. _____	_____	_____
5. _____	_____	_____
6. _____	_____	_____
7. _____	_____	_____
8. _____	_____	_____
9. _____	_____	_____

S.P. 293B (Rev. 10/22)

DEPARTMENT OF
Traffic and Public Safety
This is to certify that

David M. Bellay

Breath Test Coordinator/Instructor

IS QUALIFIED AND COMPETENT TO CONDUCT CHEMICAL BREATH ANALYSES PURSUANT TO CHAPTER 142 OF

THE LAWS OF 1966 IN THE OPERATION OF THE **Alcotest 9510**

A METHOD TO DETERMINE INTOXICATION.

GIVEN UNDER MY HAND AT TRENTON, NEW JERSEY THIS **20th** DAY OF **August**

TWO THOUSAND AND **Twenty Four**

[Signature]
COLONEL
NEW JERSEY STATE POLICE

[Signature]
ATTORNEY GENERAL
STATE OF NEW JERSEY

ORIGINAL COURSE DATES

DATE	Refresher Course PLACE	INSTRUCTOR
1. _____	_____	_____
2. _____	_____	_____
3. _____	_____	_____
4. _____	_____	_____
5. _____	_____	_____
6. _____	_____	_____
7. _____	_____	_____
8. _____	_____	_____
9. _____	_____	_____

S.P. 293B (Rev. 10/22)