

ALCOTEST 9510 PARAMETER REPORT

Equipment

Serial No.: ARMH-0249
Firmware: 8326739 1.5
WinCE application: 8326738 2.9
Configuration: 8326737 3.10

Date: 12/18/2025
Time: 12:27:15

Parameter

min. blow time	5.0	s
min. breath volume for females of age 60+	1.2	L
min. breath volume for all other	1.5	L
min. blow flow	4.5	L/min
plateau detection limit	4	%
plateau detection start conc.	70	microgram/L
neg. flow detection (part. vacuum)	10.0	hPa
neg. flow detection sensitiv	10	
cal. gas abort volume	0.4	L
result-to-zero limit	0.0050	%BAC
ambient air check limit	0.0049	%BAC
interference det. d-criterion limit abs.	38	microgram/L
interference det. d-criterion limit rel.	10.0	%
interference det. t-criterion limit abs.	8	microgram/L
interference det. t-criterion limit rel.	2.1	%
IR CO ₂ offset	10	microgram/L
IR H ₂ O offset	4	microgram/L
EC H ₂ O offset	0	microgram/L
Value-based EC aging comp. on/off (1/0)	0	
Time-based EC aging comp. on/off (1/0)	1	
Time-based EC aging comp. per month	0.2	%
Time-based EC aging comp. maximum	3.0	%
EC fatigue comp. max. sum	15000	
EC fatigue comp. factor	50	
EC fatigue comp. minutes	180	
mouth alc. mark limit	500	
mouth alc. lower limit	30	
mouth alc. slope	6	
mouth alc. zero limit	50	
mouth alc. max. neg. sum	6	
mouth alc. max. 2nd derivative	35	

ALCOTEST 9510 CERTIFICATION REPORT - WET ADJUST (PART I)
Westampton Twp

Equipment

Inst. Model No.: ALCOTEST 9510 Serial No.: ARMH-0249
Firmware: 8326739 1.5 Config.: 8326737 3.10 WinCE: 8326738 2.9

Wet Adjust Record

Wet Adjust File No.: 22	Wet Adjust Date: 12/18/2025	Wet Adjust No.: 1
	Wet Adjust Time: 13:13:05	
Concentration: 0.100 %		
Adjusting Unit: X-Cal 2000	Adj. Unit Ser. No.: ARPF-0023	Adj. Unit Exp.: 08/20/2026
Solution Lot No.: 24220	Soln. Bottle No.: 393	Adjust Soln. Exp.: 06/18/2026
Preadjust Simulator Temp.: 34.00 degree C		
Postadjust Simulator Temp.: 34.00 degree C		

Result

Procedure completed successfully.

Coordinator

Last Name: Widener - First Name: William MI: F Badge No.: 7817

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

William Widener 7817

Signed:

Date: 12/18/2025

ID: 22

ALCOTEST 9510 CERTIFICATION REPORT - DRY ADJUST (PART II)
Westampton Twp

Equipment

Inst. Model No.: ALCOTEST 9510 Serial No.: ARMH-0249
Firmware: 8326739 1.5 Config.: 8326737 3.10 WinCE: 8326738 2.9

Dry Adjust Record

Dry Adjust File No.: 23 Dry Adjust Date: 12/18/2025 Dry Adjust No.: 1
Dry Adjust Time: 13:31:38

Concentration: 0.100 %
Dry Gas Lot No.: 302-403034216 Adjust Gas Exp.: 04/30/2027
Barom. Model No.: Mensor CPG2300 Barom. Serial No.: 410013F5 Barom. Cert. Exp.: 08/25/2026
Pre-adjust Amb. Pressure: 1022 hPa Post-adjust Amb. Pressure: 1021 hPa

Result

Procedure completed successfully.

Coordinator

Last Name: Widener - First Name: William MI: F Badge No.: 7817

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

Will Widener 7817

Signed:

Date: 12/18/2025

ID: 22

ALCOTEST 9510 CERTIFICATION REPORT - LINEARITY (PART III)
Westampton Twp

Equipment

Inst. Model No.:	ALCOTEST 9510	Serial No.:	ARMH-0249		
Firmware:	8326739 1.5	Config.:	8326737 3.10	WinCE:	8326738 2.9

Linearity Record

Linearity File No.:	24	Lin. Date:	12/18/2025	Lin. No.:	1
---------------------	----	------------	------------	-----------	---

0.040% Dry Gas Lot No.:	302-402730318	Adjust. Gas Exp.:	04/27/2026
0.080% Dry Gas Lot No.:	302-402732434	Adjust. Gas Exp.:	04/28/2026
0.160% Dry Gas Lot No.:	302-402926858	Adjust. Gas Exp.:	12/19/2026
0.300% Dry Gas Lot No.:	302-402755077	Adjust. Gas Exp.:	05/26/2026

Data Summary

Function	Result %BAC	Time hh:mm:ss	Barometric Pres. [hPa]	Comment(s) or Status Code
Ambient Air Blank	0.000	13:42:47		*TEST PASSED*
Control .04 Test 1 EC	0.038	13:43:23	1020	*TEST PASSED*
Control .04 Test 1 IR	0.039	13:43:23	1020	*TEST PASSED*
Ambient Air Blank	0.000	13:44:22		*TEST PASSED*
Control .04 Test 2 EC	0.039	13:44:35	1020	*TEST PASSED*
Control .04 Test 2 IR	0.039	13:44:35	1020	*TEST PASSED*
Ambient Air Blank	0.000	13:49:32		*TEST PASSED*
Control .08 Test 3 EC	0.077	13:50:08	1020	*TEST PASSED*
Control .08 Test 3 IR	0.078	13:50:08	1020	*TEST PASSED*
Ambient Air Blank	0.000	13:51:11		*TEST PASSED*
Control .08 Test 4 EC	0.078	13:51:24	1020	*TEST PASSED*
Control .08 Test 4 IR	0.079	13:51:24	1020	*TEST PASSED*
Ambient Air Blank	0.000	14:03:10		*TEST PASSED*
Control .16 Test 5 EC	0.154	14:03:45	1020	*TEST PASSED*
Control .16 Test 5 IR	0.157	14:03:45	1020	*TEST PASSED*
Ambient Air Blank	0.000	14:04:54		*TEST PASSED*
Control .16 Test 6 EC	0.157	14:05:07	1020	*TEST PASSED*
Control .16 Test 6 IR	0.158	14:05:07	1020	*TEST PASSED*
Ambient Air Blank	0.000	14:11:37		*TEST PASSED*
Control .30 Test 7 EC	0.296	14:12:16	1020	*TEST PASSED*
Control .30 Test 7 IR	0.299	14:12:16	1020	*TEST PASSED*
Ambient Air Blank	0.000	14:13:44		*TEST PASSED*
Control .30 Test 8 EC	0.302	14:14:22	1020	*TEST PASSED*
Control .30 Test 8 IR	0.302	14:14:22	1020	*TEST PASSED*
Ambient Air Blank	0.000	14:14:53		*TEST PASSED*

Result

All tests within acceptable tolerance.

Coordinator

Last Name: Widener - First Name: William MI: F Badge No.: 7817

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

Traci Widener 7817

Signed:

Date: 12/18/2025

ID: 22

ALCOTEST 9510 CYLINDER INSTALLATION REPORT - INLET 1
Westampton Twp
SERIAL NUMBER: ARMH-0249

Equipment

Inst. Model No.: ALCOTEST 9510 Serial No.: ARMH-0249
Firmware: 8326739 1.5 Config.: 8326737 3.10 WinCE: 8326738 2.9
Cyl1 Install File No.: 25 Cyl1 Install Date: 12/18/2025 Cyl1 Install No.: 1

Control Tests (0.100%)

Installation Inlet: #1 (Upper) Post test active Cyl.: #1 (Upper)
Dry Gas Lot No.: 302-403035125 Dry Gas Lot Exp.: 05/06/2027

Data Summary

Function	Result %BAC	Time hh:mm:ss	Barometric Pres. [hPa]	Comment(s) or Status Code
Ambient Air Blank	0.000	14:27:39		*TEST PASSED*
Control Test 1			1019	*TEST PASSED*
EC Result	0.097	14:28:29		*TEST PASSED*
IR Result	0.099	14:28:29		*TEST PASSED*
Ambient Air Blank	0.000	14:29:38		*TEST PASSED*
Control Test 2			1019	*TEST PASSED*
EC Result	0.098	14:30:07		*TEST PASSED*
IR Result	0.099	14:30:07		*TEST PASSED*
Ambient Air Blank	0.000	14:31:17		*TEST PASSED*
Control Test 3			1019	*TEST PASSED*
EC Result	0.099	14:31:45		*TEST PASSED*
IR Result	0.099	14:31:45		*TEST PASSED*
Ambient Air Blank	0.000	14:32:17		*TEST PASSED*

Result

All tests within acceptable tolerance.

Coordinator

Last Name: Widener - First Name: William MI: F Badge No.: 7817

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

Tenn. W. F. M. 78/7

Signed:

Date: 12/18/2025

ID: 22

ALCOTEST 9510 CYLINDER INSTALLATION REPORT - INLET 2
Westampton Twp
SERIAL NUMBER: ARMH-0249

Equipment

Inst. Model No.: ALCOTEST 9510 Serial No.: ARMH-0249
Firmware: 8326739 1.5 Config.: 8326737 3.10 WinCE: 8326738 2.9
Cyl2 Install File No.: 26 Cyl2 Install Date: 12/18/2025 Cyl2 Install No.: 1

Control Tests (0.100%)

Installation Inlet: #2 (Lower) Post test active Cyl.: #1 (Upper)
Dry Gas Lot No.: 302-403272507 Dry Gas Lot Exp.: 02/17/2028

Data Summary

Function	Result %BAC	Time hh:mm:ss	Barometric Pres. [hPa]	Comment(s) or Status Code
Ambient Air Blank	0.000	14:40:11		*TEST PASSED*
Control Test 1			1019	*TEST PASSED*
EC Result	0.097	14:41:00		*TEST PASSED*
IR Result	0.100	14:41:00		*TEST PASSED*
Ambient Air Blank	0.000	14:42:11		*TEST PASSED*
Control Test 2			1019	*TEST PASSED*
EC Result	0.099	14:42:39		*TEST PASSED*
IR Result	0.100	14:42:39		*TEST PASSED*
Ambient Air Blank	0.000	14:43:51		*TEST PASSED*
Control Test 3			1019	*TEST PASSED*
EC Result	0.099	14:44:19		*TEST PASSED*
IR Result	0.100	14:44:19		*TEST PASSED*
Ambient Air Blank	0.000	14:44:51		*TEST PASSED*

Result

All tests within acceptable tolerance.

Coordinator

Last Name: Widener - First Name: William MI: F Badge No.: 7817

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.

787

Signed:

Date: 12/18/2025

ID: 22

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4401036

DRAEGER MEDICAL SYSTEMS INC

Sales order: 1137212700

Date: February 19, 2025

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY: +/-0.002 BrAC or +/-2% whichever is greater.

CALGAZ LOT#: 302-403272507

Manufactured Date: February 17, 2025

ETHANOL IN NITROGEN

Product Expiration: February 17, 2028

COMPONENT	PPM	(BrAC)
ETHANOL	260.5PPM	(0.100)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	263.4	(0.101)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND49826	260.1

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.


Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

APPROVED BY:

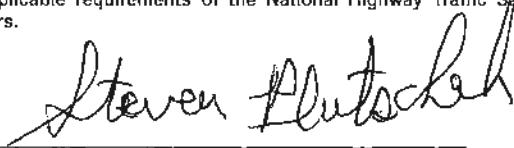

"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 179.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC

821 Chesapeake Drive, Cambridge, MD 21613-0149

Phone: (410) 228-6400 Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4401036

Sales order: 1140775256

DRAEGER MEDICAL SYSTEMS INC

Date: July 10, 2025

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY: +/-0.002 BrAC or +/-2% whichever is greater.

CALGAZ LOT#: 302-403035125

Manufactured Date: May 06, 2024

ETHANOL IN NITROGEN

Product Expiration: May 06, 2027

COMPONENT	PPM	(BrAC)
ETHANOL	260.5PPM	(0.100)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	263.8	(0.101)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND38424	260.7

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.


Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).


CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

APPROVED BY:

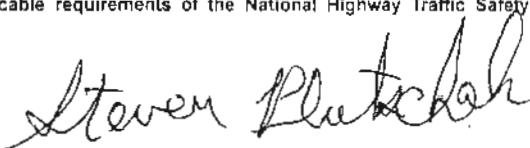

"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
821 Chesapeake Drive, Cambridge, MD 21613-0149
Phone: (410) 228-6400 Fax: (410) 228-4251

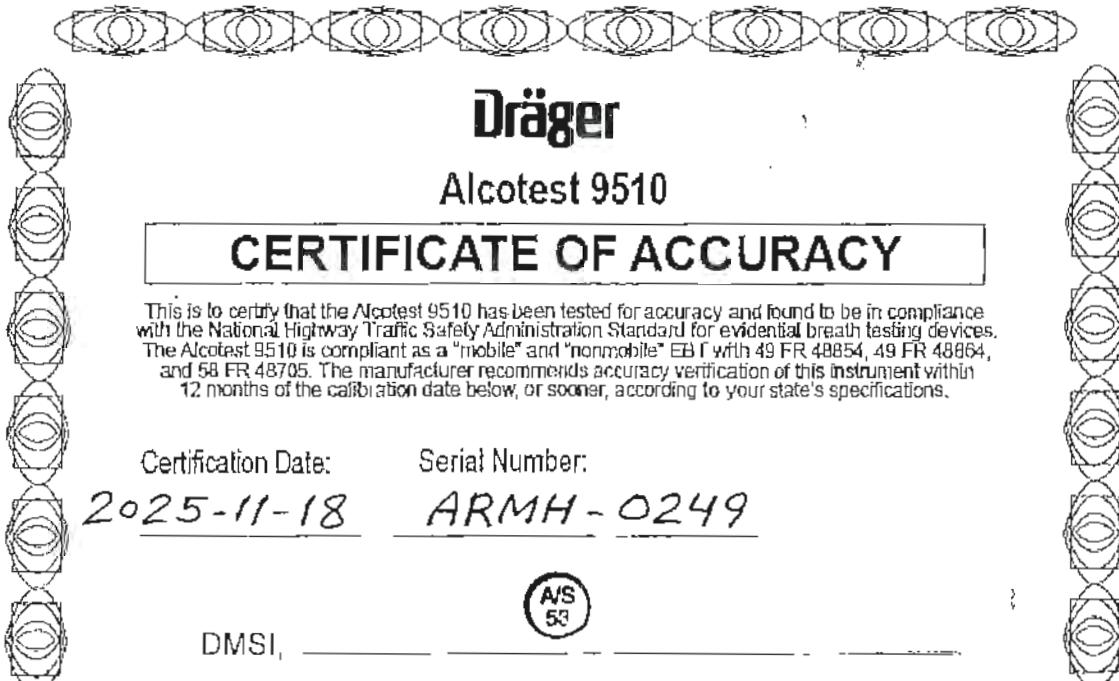

Dräger

Alcotest 9510

CERTIFICATE OF ACCURACY

This is to certify that the Alcotest 9510 has been tested for accuracy and found to be in compliance with the National Highway Traffic Safety Administration Standard for evidential breath testing devices. The Alcotest 9510 is compliant as a "mobile" and "nonmobile" EB I with 49 FR 48854, 49 FR 48864, and 58 FR 48705. The manufacturer recommends accuracy verification of this instrument within 12 months of the calibration date below, or sooner, according to your state's specifications.

Certification Date: Serial Num:

2025-11-18 ARMH-0249

DMSI _____





State of New Jersey

OFFICE OF THE ATTORNEY GENERAL

DEPARTMENT OF LAW AND PUBLIC SAFETY

DIVISION OF STATE POLICE

POST OFFICE BOX 7068

WEST TRENTON, NJ 08628-0068

(609) 882-2000

PHILIP D. MURPHY

Governor

TAHESHA L. WAY

Lt. Governor

MATTHEW J. PLATKIN

Attorney General

COLONEL PATRICK J. CALLAHAN

Superintendent

CERTIFICATION OF ANALYSIS 0.100 PERCENT BREATH ALCOHOL SIMULATOR SOLUTION

ACCEPTANCE SPECIFICATIONS FOR BREATH ALCOHOL SIMULATOR SOLUTION: Ethyl alcohol concentration within, but not exceeding, the range of 0.1174 to 0.1246 grams per 100 milliliters of solution.

MANUFACTURER: Draeger, Inc.

ANALYSIS DATE: 07/22/2024

BREATH ALCOHOL SIMULATOR SOLUTION LOT NUMBER: 24220

Representative samples of the above-referenced Lot Number were tested by Gas Chromatography and found to have a mean ethyl alcohol concentration range of 0.1201 to 0.1223 grams per 100 milliliters of solution.


This lot of breath alcohol simulator solution may be utilized as a known traceable standard for the purpose of conducting periodic tests, pursuant to N.J.A.C. 13:51-4.3, of approved breath test instruments (N.J.A.C. 13:51-3.5) utilized by law enforcement agencies in this State. The manufacturer's expiration date for this lot of breath alcohol simulator solution is June 18, 2026.

As OFS Director for the Division of State Police, I hereby certify and attest that the tests and results documented in this Certificate of Analysis were performed at the Office of Forensic Sciences of the Division of State Police on properly functioning and calibrated instruments and equipment. All procedures utilized are accurate, objective, and performed on a routine basis by personnel within the Office of Forensic Sciences, in accordance with their professional duties and responsibilities.

Michael Kennedy
Michael Kennedy
Director
NJSP Office of Forensic Sciences

Sworn to and subscribed before me this 29 day of July, 2024.

[Signature]
Notary

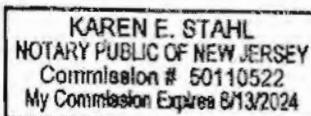

"An Internationally Accredited Agency"


New Jersey Is An Equal Opportunity Employer
Printed on Recycled Paper and Rays. 24hr





CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77086
PO Number: SUC4303700862

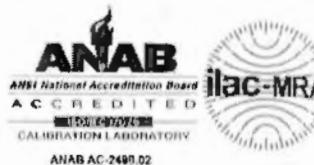

Certificate/SO Number: 5-F8B2G-380-1 Revision 0

Manufacturer: Drager Safety AG & Co. KGaA
Model Number: X-Cal 2000
Description: Breath Alcohol Simulator
Serial Number: ARPF-0023
ID: NONE

As-Found: Out Of Tolerance
As-Left: In Tolerance

Issue Date: Aug 20, 2025
Calibration Date: Aug 20, 2025
Due Date: Aug 20, 2026

Calibrated To: Manufacturer Specification
Calibration Procedure: 1-AC103519-2

Transcal Calibration Laboratories have been audited and found in compliance with ISO/IEC 17025:2017. Accredited calibrations performed within the Lab Scope of Accreditation are indicated by the presence of the Accrediting Body Logo and Certificate Number. Any measurements on an accredited calibration not covered by the Lab Scope of Accreditation are listed in the notes section of the certificate. NCC, NRC, CLAS or ANAB do not guarantee the accuracy of an individual calibration by accredited laboratories.

Transcal calibrations, as applicable, are performed in compliance with the requirements of the Transcal Quality Manual QAC-P01-000, the customer Purchase Order, and/or Quality Agreement requirements, ISO 9001:2015, ANSI/NCSL Z540.1-1994 (R2002), and ISO 10012:2005, as applicable. When specified contractually, the requirements of ISO TS 10846:2009, IEC/TS 21, IEC/TS 60068-2-29, ASME NGA-1 2012, and ANSI/NCSL Z540.3-2006 (R2012) are also covered.

Complete records of work performed are maintained by Transcal and are available for inspection. Laboratory standards used in the performance of this calibration are listed on this certificate.

Transcal documents the traceability of measurements to the SI units through the National Institute of Standards and Technology (NIST), or the National Research Council of Canada (NRC), or other national measurement institutes (NMI) that are signatories to the CIPM Mutual Recognition Arrangement, or accepted fundamental nuclear physical constants, or by the use of specified methods, reference standards or ratio type measurements. Documentation supporting traceability information is available for review upon written request at a Transcal facility. The measured quantity and the measurement uncertainty are required for further dissemination of traceability.

Uncertainties are reported with a coverage factor k=2, providing a level of confidence of approximately 95%. All calibrations have been performed using juncstones having a TUR of 4:1 or better (3:1 for mass calibrations), unless otherwise noted. The Test Uncertainty Ratio (TUR) is calculated in accordance with NIST International RD-18. For mass calibrations: Conventional mass referenced to 6.0 g/cm³.

The results in this report relate only to the item calibrated or tested. Recorded calibration data is valid at the time of calibration within the stated uncertainties at the environmental conditions noted. The determination of compliance to the specification is specific to the model/serial no./ID no. referenced above based on the tolerances shown; these tolerances are either the original equipment manufacturer (OEM's) warranted specifications or the user's requested specifications. Any number of factors can cause a unit to drift out of tolerance at any time following its calibration. Limitations on the use of this instrument are detailed in the OEM's operating instructions. This certificate may not be reproduced except in full, without the written approval of Transcal. Additional information, if applicable may be included on separate report(s).

Notes:

Unit was received Out of Tolerance and adjustments were made for best overall accuracy.

The DOT readings were verified.

Date Received: August 08, 2025
Service Level: R0


Certificate - Page 1 of 5
Reported on December 03, 2025

Customer Number: 1-659111-000
CPS F20-014R11 07/27/23 (PP01R9 4/6/2021)



CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SJC4303700862

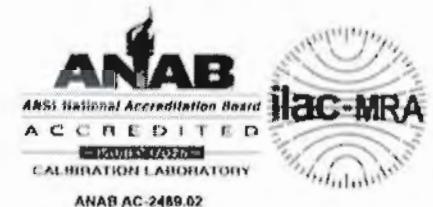

Certificate/SO Number: 5-F8B2G-380-1 Revision 0

As Found Data										
Description	Setpoints	Accuracy	Low Limit	High Limit	As Found	O D T	Cal Process Uncertainty (k=2; z)	Measurement Uncertainty (k=2; z)	Units	TUR
Function Checks										
Bubble Check			P	P	P					
Seal Check			P	P	P					
Temperature Source: Accuracy Test										
Accuracy Test	34.00 °C	±(0.02 °C)	33.98	34.02	33.97 °C	+	1.5e-002	1.6e-002	°C	1.3 : 1
Temperature Source: Stability Test										
Stability Test	0.00 °C	±(0.02 °C)	-0.02	0.02	0.00 °C	+	1.5e-002	1.6e-002	°C	1.3 : 1

As Left Data										
Description	Setpoints	Accuracy	Low Limit	High Limit	As Left	O O T	Cal Process Uncertainty (k=2; \$)	Measurement Uncertainty (k=2; \$)	Units	TUR
Function Checks										
Bubble Check			P	P	P					
Seal Check			P	P	P					
Temperature Source: Accuracy Test										
Accuracy Test	34.00 °C	±(0.02 °C)	33.98	34.02	34.00 °C	1.6e-002	1.6e-002	°C		1.3 : 1
Temperature Source: Stability Test										
Stability Test	0.00 °C	±(0.02 °C)	-0.02	0.02	0.00 °C	1.6e-002	1.6e-002	°C		1.3 : 1


Field not applicable.



CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085

PO Number: SUC4303700862

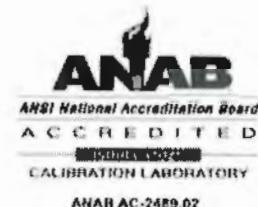

Certificate/SO Number: 5-F8B2G-380-1 Revision 0

Traceable Standards

Asset	Manufacturer	Model Number	Description	Cal Date	Due Date	Traceability Number	Use
05H1479	AccuMac Corporation	AM1760-12-S	Secondary SPRT	12-Aug-24	31-Aug-25	H32XM-4-1	AF/AL
HP927312	Hart Scientific/Fluke	1575	Super Thermometer	10-Jul-24	31-Jan-28	B-HP927312-0-1	AF/AL

The use of the standard is defined as: AF - used for as-found readings, AL - used for as-left readings.


Environmental Data

Temperature	Relative Humidity	Temp / RH Asset	Lab Area	Lab Description
70.70°F / 21.50°C	55.80%	DewK11	G	Temperature

Decision Rule

When compliance statements are present, they are reported without factoring in the effects of uncertainty and comply with the guidelines as follows: The acceptance zone is defined as: less than or equal to the high limit, and/or greater than or equal to the low limit. The rejection zones are defined as greater than the high limit and/or less than the low limit. Single measurement results in the acceptance zone are identified as in-tolerance. Single measurement results in the rejection zone are identified as out-of-tolerance (OOT). When all measurement results are in the acceptance zone for repeated measurements, for the same characteristic, the test is identified as in-tolerance. For repeated characteristic measurements, a single measurement result in the rejection zone, will cause the test to be identified as out-of-tolerance (OOT). Data rejection for cause, (ouliers) is permitted after the "Determining and Verifying Out Of Tolerance (OOT) and/or Out of Fall Readings" procedure outlined in this document has been completed and the anomalous reading cannot be repeated, and the anomalous reading does not represent the system under test. Statements of conformity are binary.

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SUC4303700862

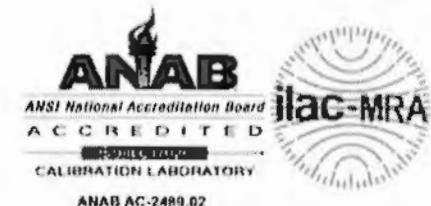

Certificate/SO Number: 5-F8B2G-380-1 Revision 0

Legend

Topic	Description
Accuracy	UUT specification that establishes expected tolerances and a time limit (calibration interval) over which the instrument is expected to hold these tolerances
As Found	Initial measurement results
As Left	Measurement results after adjustment and/or repair
Blank Data Field	Test is not applicable for the UUT
Cal Process Uncertainty (CPU)	The uncertainty of calibration process for the reported measurement result
Calibration Date	Indicates the date that the calibration was completed
Cover Factor (k)	A measure of uncertainty that defines an interval about the measurement result
Due Date	Indicates the end of the calibration cycle as requested by the customer
Issue Date	Indicates the date that the calibration has passed the Data Review Process and was signed by an authorized signatory or the date that a revision to the original certificate has been issued
Low / High Limits	Establishes UUT acceptable performance limits for the test measurement
Measurement Uncertainty	The dispersion of the values attributed to a measured quantity
OOA	Out of Acceptance (#)
OOT	Out of Tolerance (*)
Setpoints	Measurement target values
Traceability	Unbroken chain of comparisons relating an instrument's measurements to a known standard(s)
Traceability Number	Unique identifier(s) used to document traceability of calibration standards
TUR	Test Uncertainty Ratio, ratio of the tolerance or specification of the test measurement in relation to the uncertainty in measurement results
UUT	Unit Under test



CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: GUC4303700862



Certificate/SO Number: 5-F8B2G-380-1 Revision 0

Calibrated At:
16115 Park Row
Houston, TX 77084

Facility Responsible:
16115 Park Row
Houston, TX 77084
800-828-1470

Unit Barcode:

Date Received: August 08, 2025

Calibrated By:
 Electronically Signed By:
Jose Martinez

Jose Martinez Aug 20, 2025
Calibration Technician 08:41:08 -04:00

Reviewed By:
 Electronically Signed By:
Luis Ardua for

Josh Soilnau Aug 20, 2025
Lab Manager 13:57:49 -04:00

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SUC4303700862

**Certificate/SO Number: 5-F8B2G-140-1 Revision 0**

Manufacturer: Wika Instr/Mensor Corp/Trend
Model Number: CPG2300
Description: Portable Barometer
Serial Number: 410013F5
ID: NONE

As-Found: Out Of Tolerance
As-Left: In Tolerance

Issue Date: Aug 26, 2025
Calibration Date: Aug 25, 2025
Due Date: Aug 25, 2026

Calibrated To: Manufacturer Specification
Calibration Procedure: 1-AC107288-0

Transcal Calibration Laboratories have been audited and found in compliance with ISO/IEC 17025:2017. Accredited calibrations performed within the Lab Scope of Accreditation are indicated by the presence of the Accrediting Body Logo and Certificate Number. Any measurements on an accredited calibration not covered by the Lab Scope of Accreditation are listed in the notes section of the certificate. SCC, NRC, CLAS or ANAB do not guarantee the accuracy of an individual calibration by accredited laboratories.

Transcal calibrations, as applicable, are performed in compliance with the requirements of the Transcal Quality Manual QAC-P01-000, the customer Purchase Order and/or Quality Agreement requirements, ISO 9001:2015, ANSI/NCSL Z540.1-1994 (R2002), and ISO 10012:2003, as applicable. When specified contractually, the requirements of ISO TS 16949:2009, 10CFR21, 10CFR50 App. B, ASME NQA-1:2012, and ANSI/NCSL Z540.3-2006 (R2013) are also covered.

Complete records of work performed are maintained by Transcal and are available for inspection. Laboratory standards used in the performance of this calibration are listed on this certificate.

Transcal documents the traceability of measurements to the SI units through the National Institute of Standards and Technology (NIST), or the National Research Council of Canada (NRC), or other national measurement institutes (NMI) that are signatories to the CIPM Mutual Recognition Arrangement, or accepted fundamental and/or natural physical constants, or by the use of specified methods, consensus standards or ratio type measurements. Documentation supporting traceability information is available for review upon written request at a Transcal facility. The measured quantity and the measurement uncertainty are required for further dissemination of traceability.

Uncertainties are reported with a coverage factor $k=2$, providing a level of confidence of approximately 95%. All calibrations have been performed using procedures having a TUR of 4:1 or better (3:1 for mass calibrations), unless otherwise noted. The Test Uncertainty Ratio (TUR) is calculated in accordance with NCSL International RP-18. For mass calibrations, Conventional mass referenced to 8.0 g/cm³.

The results in this report relate only to the item calibrated or tested. Recorded calibration data is valid at the time of calibration within the stated uncertainties at the environmental conditions noted. The determination of compliance to the specification is specific to the model/serial no./ID no. referenced above based on the tolerances shown; these tolerances are either the original equipment manufacturers' (OEM's) warranted specifications or the client's requested specifications. Any number of factors can cause a unit to drift out of tolerance at any time following its calibration. Limitations on the uses of this instrument are detailed in the OEM's operating instructions. This certificate may not be reproduced except in full, without the written approval of Transcal. Additional information, if applicable may be included on separate report(s).

Notes:

Unit received out of tolerance. Adjustments were made to meet customer specs.

The OOT readings were verified

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SUC4303700862



Certificate/SO Number: 5-F8B2G-140-1 Revision 0

As Found Data										
Description	Setpoints	Accuracy	Low Limit	High Limit	As Found	O O T	Cal Process Uncertainty (k=2; z)	Measurement Uncertainty (k=2; z)	Units	TUR
Pressure Measure: 552 to 1172 mbara Range										
	550.11mbara	±(0.015% FS)	549.93	550.29	549.90 mbara	*	1.0e-002	1.2e-002	mbara	17.2 : 1
	610.05mbara	±(0.015% FS)	609.87	610.23	609.80 mbara	*	1.2e-002	1.3e-002	mbara	15.5 : 1
	680.41mbara	±(0.015% FS)	680.23	680.59	680.20 mbara	*	1.3e-002	1.4e-002	mbara	13.9 : 1
	734.31mbara	±(0.015% FS)	734.13	734.49	734.10 mbara	*	1.4e-002	1.5e-002	mbara	12.9 : 1
	804.66mbara	±(0.015% FS)	804.48	804.84	804.40 mbara	*	1.5e-002	1.6e-002	mbara	11.8 : 1
	864.93mbara	±(0.015% FS)	864.75	865.11	864.70 mbara	*	1.6e-002	1.7e-002	mbara	11.0 : 1
	924.93mbara	±(0.015% FS)	924.75	925.11	924.70 mbara	*	1.8e-002	1.8e-002	mbara	10.2 : 1
	985.24mbara	±(0.015% FS)	985.06	985.42	985.00 mbara	*	1.9e-002	2.0e-002	mbara	9.6 : 1
	1043.9mbara	±(0.015% FS)	1043.7	1044.1	1043.7 mbara	*	2.0e-002	6.1e-002	mbara	10.1 : 1
	1114.2mbara	±(0.015% FS)	1114.0	1114.4	1114.0 mbara	*	2.1e-002	6.1e-002	mbara	9.4 : 1
	1174.6mbara	±(0.015% FS)	1174.4	1174.8	1174.4 mbara	*	2.2e-002	6.2e-002	mbara	9.0 : 1
	924.93mbara	±(0.015% FS)	924.75	925.11	924.70 mbara	*	1.8e-002	1.8e-002	mbara	10.2 : 1
	864.93mbara	±(0.015% FS)	864.75	865.11	864.70 mbara	*	1.6e-002	1.7e-002	mbara	11.0 : 1
	804.66mbara	±(0.015% FS)	804.47	804.83	804.50 mbara	*	1.5e-002	1.6e-002	mbara	11.8 : 1

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SUC4303700862



Certificate/SO Number: 5-F8B2G-140-1 Revision 0

As Left Data

Description	Setpoints	Accuracy	Low Limit	High Limit	As Left	O T	Cal Process Uncertainty (k=2; \pm)	Measurement Uncertainty (k=2; \pm)	Units	TUR
Pressure Measure: 552 to 1172 mbara Range										
	550.08mbara	$\pm(0.015\% \text{ FS})$	549.90	550.26	550.10 mbara		1.0e-002	1.2e-002	mbara	17.2 : 1
	610.02mbara	$\pm(0.015\% \text{ FS})$	609.84	610.20	610.00 mbara		1.2e-002	1.3e-002	mbara	15.5 : 1
	680.38mbara	$\pm(0.015\% \text{ FS})$	680.20	680.56	680.40 mbara		1.3e-002	1.4e-002	mbara	13.9 : 1
	734.28mbara	$\pm(0.015\% \text{ FS})$	734.10	734.46	734.30 mbara		1.4e-002	1.5e-002	mbara	12.9 : 1
	804.65mbara	$\pm(0.015\% \text{ FS})$	804.47	804.83	804.70 mbara		1.5e-002	1.6e-002	mbara	11.8 : 1
	864.92mbara	$\pm(0.015\% \text{ FS})$	864.74	865.10	865.00 mbara		1.6e-002	1.7e-002	mbara	11.0 : 1
	924.92mbara	$\pm(0.015\% \text{ FS})$	924.74	925.10	925.00 mbara		1.6e-002	1.8e-002	mbara	10.2 : 1
	985.22mbara	$\pm(0.015\% \text{ FS})$	985.04	985.40	985.30 mbara		1.9e-002	2.0e-002	mbara	9.8 : 1
	1043.9mbara	$\pm(0.015\% \text{ FS})$	1043.7	1044.1	1043.8 mbara		2.0e-002	6.1e-002	mbara	10.1 : 1
	1114.2mbara	$\pm(0.015\% \text{ FS})$	1114.0	1114.4	1114.3 mbara		2.1e-002	6.1e-002	mbara	9.4 : 1
	1174.6mbara	$\pm(0.015\% \text{ FS})$	1174.4	1174.8	1174.6 mbara		2.2e-002	6.2e-002	mbara	9.0 : 1
	924.92mbara	$\pm(0.015\% \text{ FS})$	924.74	925.10	925.00 mbara		1.8e-002	1.8e-002	mbara	10.2 : 1
	864.92mbara	$\pm(0.015\% \text{ FS})$	864.74	865.10	865.00 mbara		1.6e-002	1.7e-002	mbara	11.0 : 1
	804.64mbara	$\pm(0.015\% \text{ FS})$	804.46	804.82	804.70 mbara		1.6e-002	1.6e-002	mbara	11.8 : 1

Field not applicable.

Traceable Standards

Asset	Manufacturer	Model Number	Description	Cal Date	Due Date	Traceability Number	Use
DW11BA	Fluke/DH Instruments	PG7601	Piston Gauge	31-Jul-25	31-Jul-26	5-&DW11BA-20-1	AF/AL
DW11CA	Fluke/DH Instruments	MS-AMH-38	AMH Mass Set	5-Jun-25	30-Sep-25	5-&DW11CA-40-1	AF/AL
DW11LOW	Fluke/DH Instruments	PC-7100/7500-10-TC	Gas Piston-Cylinder Module	8-Apr-22	30-Apr-27	5-&DW11LOW-3-1	AF/AL
DW11MASS	Fluke/DH Instruments	MS-AMH-38	AMH Mass Set	5-Mar-25	31-Mar-26	5-&DW11MASS-12-1	AF/AL

The use of the standard is defined as: AF - used for as-found readings, AL - used for as-left readings.

Date Received: August 08, 2025

Service Level: RS

Certificate - Page 3 of 6

Reprinted on August 27, 2025

Customer Number: 1-659111-000

OPS-F20-014R11 07/27/23 FP001R9 4/9/2021

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SUC4303700862



Certificate/SO Number: 5-F8B2G-140-1 Revision 0


Environmental Data

Temperature	Relative Humidity	Temp / RH Asset	Lab Area	Lab Description
As Found: 72.32°F / 22.40°C	43.00%	DewK9	B	GP Pressure
As Left: 72.00°F / 22.22°C	43.00%	DewK9	B	GP Pressure

Decision Rule

When compliance statements are present, they are reported without factoring in the effects of uncertainty and comply with the guidelines as follows: The acceptance zone is defined as: less than or equal to the high limit, and/or greater than or equal to the low limit. The rejection zones are defined as greater than the high limit and/or less than the low limit. Single measurement results in the acceptance zone are identified as in-tolerance. Single measurement results in the rejection zone are identified as out-of-tolerance (OOT). When all measurement results are in the acceptance zone for repeated measurements, for the same characteristic, the test is identified as in-tolerance. For repeated characteristic measurements, a single measurement result in the rejection zone, will cause the test to be identified as out-of-tolerance (OOT). Data rejection for cause, (outliers) is permitted after the "Determining and Verifying Out Of Tolerance (OOT) and/or Op Fail Readings" procedure outlined in this document has been completed and the anomalous reading cannot be repeated, and the anomalous reading does not represent the system under test. Statements of conformity are binary.

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SUC4303700862

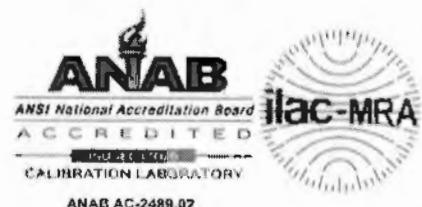

Certificate/SO Number: 5-F8B2G-140-1 Revision 0

Legend

Topic	Description
Accuracy	UUT specification that establishes expected tolerances and a time limit (calibration interval) over which the instrument is expected to hold these tolerances
As Found	Initial measurement results
As Left	Measurement results after adjustment and/or repair
Blank Data Field	Test is not applicable for the UUT
Cal Process Uncertainty (CPU)	The uncertainty of calibration process for the reported measurement result
Calibration Date	Indicates the date that the calibration was completed
Cover Factor (k)	A measure of uncertainty that defines an interval about the measurement result
Due Date	Indicates the end of the calibration cycle as requested by the customer
Issue Date	Indicates the date that the calibration has passed the Data Review Process and was signed by an authorized signatory or the date that a revision to the original certificate has been issued
Low / High Limits	Establishes UUT acceptable performance limits for the test measurement
Measurement Uncertainty	The dispersion of the values attributed to a measured quantity
OOA	Out of Acceptance (#)
OOT	Out of Tolerance (*)
Setpoints	Measurement target values
Traceability	Unbroken chain of comparisons relating an instrument's measurements to a known standard(s)
Traceability Number	Unique identifier(s) used to document traceability of calibration standards
TUR	Test Uncertainty Ratio, ratio of the tolerance or specification of the test measurement in relation to the uncertainty in measurement results
UUT	Unit Under test



CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SUC4303700862



Certificate/SO Number: 5-F8B2G-140-1 Revision 0

Calibrated At: 16115 Park Row Houston, TX 77084	Facility Responsible: 16115 Park Row Houston, TX 77084 800-828-1470	Calibrated By: Electronically Signed By: Alex Spiker	Reviewed By: Electronically Signed By: Graham Walker for
Unit Barcode:	0900B541813	Alex Spiker Aug 26, 2025 Calibration Technician	Josh Soileau Aug 26, 2025 Lab Manager
Date Received: August 06, 2025	Service Level: R9	Certificate - Page 6 of 6 Reprinted on August 27, 2025	
			Customer Number: 1-659111-000 OPS-F20-014R11 07/27/23 FP001R9 4/9/2021

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4401036

DRAEGER MEDICAL SYSTEMS INC

Sales order: 1130434779

Date: May 23, 2024

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY: +/- 0.002 BrAC or +/- 2% whichever is greater.

CAL.GAZ LOT#: 302-403034216

Manufactured Date: April 30, 2024

ETHANOL IN NITROGEN

Product Expiration: April 30, 2027

COMPONENT	PPM	(BrAC)
ETHANOL	260.5PPM	(0.100)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	264.1	(0.101)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND38424	260.7

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.


Certification Numbers: A679-20190918, D049803-20220329

No affecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

APPROVED BY:

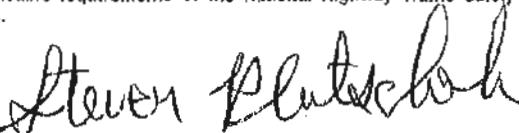

"We certify that all the cylinders for the lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
821 Chesapeake Drive, Cambridge, MD 21613-0149
Phone: (410) 228-6400 Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

DEPT OF LAW AND PUBLIC SAFETY

Sales order: 1120656707
Date: May 30, 2023

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY: +/-0.002 BrAC or +/-2% whichever is greater

CALGAZ LOT#: 302-402730318

ETHANOL IN NITROGEN

Product Expiration: April 27, 2026

COMPONENT	PPM	(BrAC)
ETHANOL	104.2PPM	(0.040)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	104 PPM	(BrAC)
ETHANOL	107.8	(0.041)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND38424	260.7

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17026 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.
Certification Numbers: A679-20190918, D049803-20220329


No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: April 27, 2023

APPROVED BY:

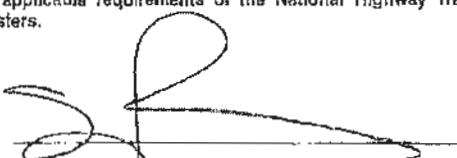

"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
821 Chesapeake Drive, Cambridge, MD 21613-0149
Phone: (410) 228-6400 Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

DEPT OF LAW AND PUBLIC SAFETY

Sales order: 1120656618

Date: May 25, 2023

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY: +/-0.002 BrAC or +/-2% whichever is greater.

CALGAZ LOT#: 302-402732434

ETHANOL IN NITROGEN

Product Expiration: April 28, 2026

COMPONENT	PPM	(BrAC)
ETHANOL	208.4PPM	(0.080)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	210.4	(0.081)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND38424	260.7

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.

Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: April 28, 2023

APPROVED BY:



"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.55 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
821 Chesapeake Drive, Cambridge, MD 21613-0149
Phone: (410) 228-6400 Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4401040NJ

Sales order: 1126209454

DRAEGER MEDICAL SYSTEMS INC

Date: December 19, 2023

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY: +/-0.002 BrAC or +/-2% whichever is greater.

CALGAZ LOT#: 302-402926858

ETHANOL IN NITROGEN

Product Expiration: December 19, 2026

COMPONENT	PPM	(BrAC)
ETHANOL	416.8PPM	(0.160)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	419.3	(0.161)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND38424	260.7

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.

Certification Numbers: A679-20190918, D049803-20220329


No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: December 19, 2023

APPROVED BY:

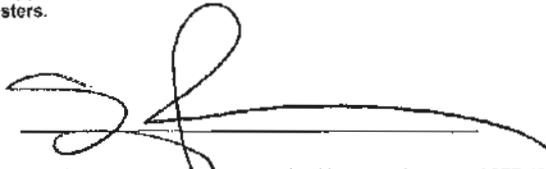

"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.85 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
821 Chesapeake Drive, Cambridge, MD 21613-0149
Phone: (410) 228-6400 Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Sales order: 1120654720

Date: May 30, 2023

DEPT OF LAW AND PUBLIC SAFETY

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer

ANALYTICAL ACCURACY: +/-0.002 BrAC or +/-2% whichever is greater.

CALGAZ LOT#: 302-402755077

ETHANOL IN NITROGEN

Product Expiration: May 26, 2026

COMPONENT	PPM	(BrAC)
ETHANOL	781.5PPM	(0.300)
NITROGEN	BAL	
AVERAGE ANALYTICAL VALUE	PPM	(BrAC)
ETHANOL	794.4	(0.305)

REFERENCE STANDARD	CYLINDER	CONCENTRATION PPM
N.M.I. TRACEABLE STANDARDS*	ND38424	260.7

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.

Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: May 26, 2023

APPROVED BY:



"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
821 Chesapeake Drive, Cambridge, MD 21613-0149
Phone: (410) 228-6400 Fax: (410) 228-4251

DEPARTMENT OF
Law and Public Safety
This is to certify that

William F. Widener

New Jersey State Police

IS QUALIFIED AND COMPETENT TO CONDUCT BREATHALYSES PURSUANT TO CHAPTER 140 OF
THE LAWS OF 1964 IN THE OPERATION OF THE Alcotest 19510

A METER TO DETERMINE BLOOD ALCOHOL

GIVEN UNDER MY HAND AT TRENTON, NEW JERSEY THIS 11th DAY OF January

Two Thousand and Twenty Three

John P. Codd
COLONEL
NEW JERSEY STATE POLICE

Mr. J. A.
ATTORNEY GENERAL
STATE OF NEW JERSEY

ORIGINAL COURSE DATES

	DATE	Refresher Course	PLACE	INSTRUCTOR
1	3-27-25	MCEA		76
2				
3				
4				
5				
6				
7				
8				
9				

6.1-2608 (Rev. 10/22)

DEPARTMENT OF
Law and Public Safety
This is to certify that

William F. Widener

Breath Test Coordinator/Instructor

IS QUALIFIED AND COMPETENT TO CONDUCT BREATHALYSES PURSUANT TO CHAPTER 140 OF
THE LAWS OF 1964 IN THE OPERATION OF THE Alcotest 19510

A METER TO DETERMINE BLOOD ALCOHOL

GIVEN UNDER MY HAND AT TRENTON, NEW JERSEY THIS 16th DAY OF May

Two Thousand and Twenty Three

John P. Codd

COLONEL

NEW JERSEY STATE POLICE

Mr. J. A.

ATTORNEY GENERAL

STATE OF NEW JERSEY

ORIGINAL COURSE DATES

	DATE	Refresher Course	PLACE	INSTRUCTOR
1				
2				
3				
4				
5				
6				
7				
8				
9				

6.1-2608 (Rev. 10/22)



Alcotest 9510

CERTIFICATE OF ACCURACY

This is to certify that the Alcotest 9510 has been tested for accuracy and found to be in compliance with the National Highway Traffic Safety Administration Standard for evidential breath testing devices. The Alcotest 9510 is compliant as a "mobile" and "nonmobile" EBT with 49 FR 48854, 49 FR 48864, and 58 FR 48705. The manufacturer recommends accuracy verification of this instrument within 12 months of the calibration date below, or sooner, according to your state's specifications.

Certification Date: Serial Number:

2025-11-18 ARMH-0249



DMSI, _____